



DNH^{AS}

**N-3770 Kragerø
NORWAY**
 Phone: (47) 35 98 56 00
 Fax: (47) 35 98 56 10
 E-mail: dnh@dnh.no
 Web-site: www.dnh.no

**DNH WW Ltd.
England**
 Phone:.....(44) 1908 275 000
 Fax:.....(44) 1908 275 100
 E-mail:.....dnh@dnh.co.uk



**DNH
France**
 Phone:.....(33) 1 5380 0276
 Fax:.....(33) 1 4588 1594
 E-mail:.....etienne@dnh.no

**DNH GmbH
Germany**
 Phone:.....(49) 040 6569 30-0
 Fax:.....(49) 040 6569 30-30
 E-mail:.....dnh@dnh.de

**DNH
Speakers Inc.
USA**
 Phone:.....(1) 484 494 5790
 Fax:.....(1) 484 494 5793
 E-mail:.....dnh@dnhspeakers.com

H-62S(T)

ISO 9001 CERTIFIED

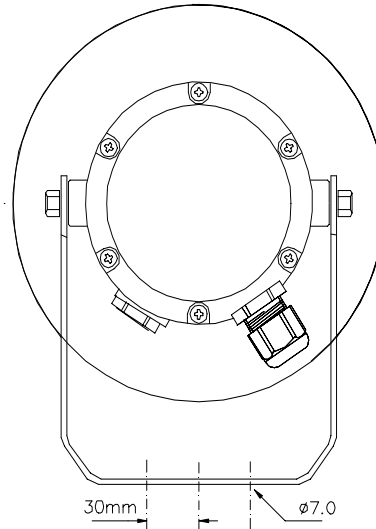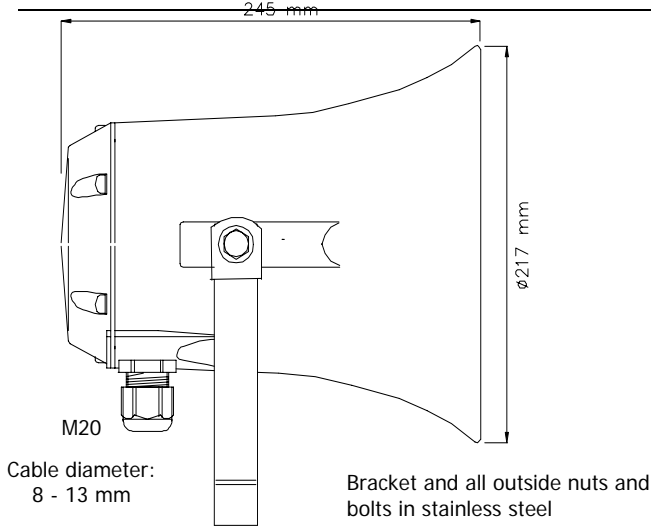


50/100 Volt Combined
Transformer
(Optional 70V)
Primary Connectors:
6 : 8 70 Volt line
6 : 9 100 volt line

Secondary nominal
tappings:
1 : 4 25,0 W
1 : 3 12,5 W
2 : 4 8,0 W
1 : 2 7,0 W
3 : 4 3,0 W
2 : 3 1,7 W

6 = White, 8 = Green
9 = Red

Soud pressure levels at different frequencies at 1W/1m sine wave.

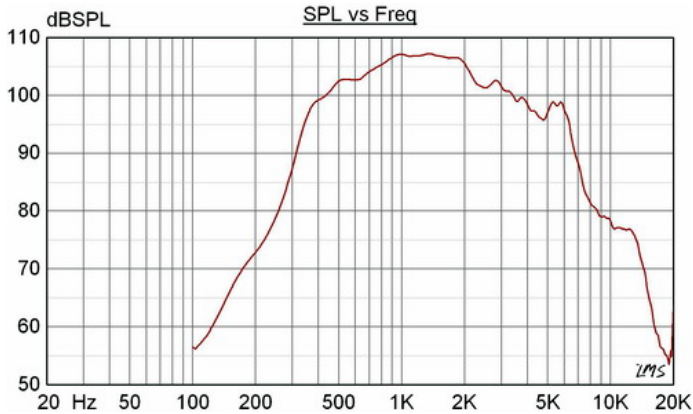

Material / Color Aluminum alloy / RAL 7031
 Mounting Bracket
 Termination Screw terminal
 Weight 3,9 kg
 IP-rating 55
 Max / min amb temp 150 °C / -50 °C
 Rated / max power 25 W / 30 W
 SPL 1W/1m 109 dB
 SPL rated power 122 dB
 Effective freq. range 300 – 7000 Hz
 Dispersion (-6dB) 1kHz / 4kHz 115° / 30°
 Options Impedances, colors, labels

Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received.
- Fasten the loudspeaker to the wall with 3 screws on the bracket.
- To change the position of the loudspeaker, please adjust the bracket (by loosening / tightening the screws) as required.
- Fasten lid with a torque of 2 - 3 Nm.
- H-62S is designed to withstand sound shocks (maximum 175 dB).
- Do not open loudspeaker when energized.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- The aluminum surface of the loudspeaker should be regularly treated with paint at the same interval as with other similar outdoor equipment.
- This loudspeaker is supplied with a 2 year warranty against defective materials and workmanship.

