

PAGING HORN SPEAKER



FEATURES


- Excellent intelligibility & Loudness, High directivity, Good reliability.
- Adjust direction : Vertical 240°, Horizontal 160°.
- Units are commonly installed in commercial buildings, distribution centers, factories, schools, public areas, civic centers and recreational facilities.

SPECIFICATIONS


	HS-50	HS-40RT
Rated Input	50W	40W
Impedance	200Ω(W) 400Ω(G)	250Ω(W) 500Ω(G)
Frequency Response	380Hz-6.5kHz	380Hz-6.5kHz
SPL(1m/1W)	109dB	109dB
Weight	3.1kg	2.95kg
Demension(mm)	∅320 ×350	320 ×210 ×365

POLAR PATTERN DIAGRAM

HS-50

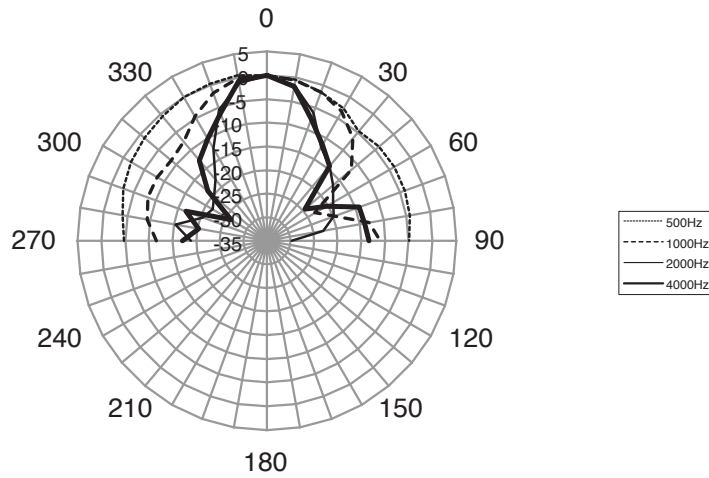

HS-40RT

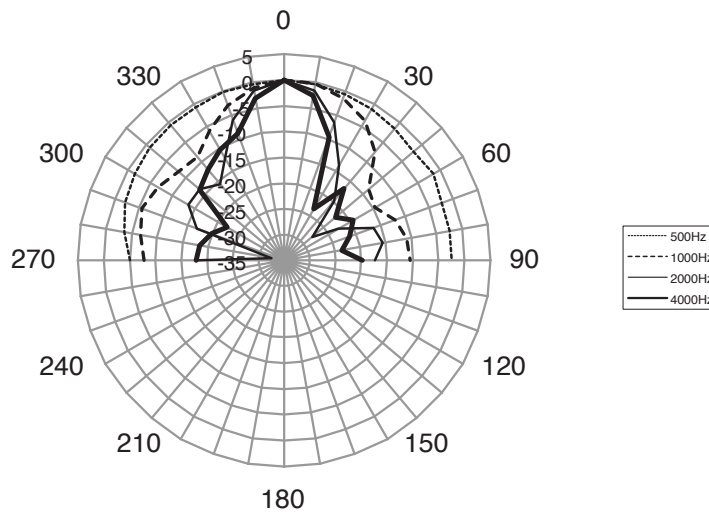

interM

OFFICE : 653-5 BANGHAK-DONG, DOBONG-KU, SEOUL, KOREA TEL : 82-2-2289-8140~8, FAX : 82-2-2289-8149

Home page : <http://www.inter-m.com>

E-mail : export@inter-m.com

9027700520