



SYSTEM-2240M

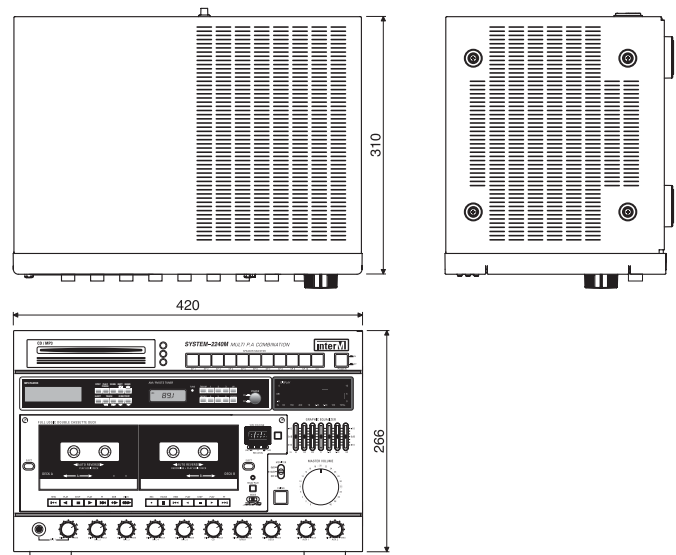

- Output Power : 240W(RMS) @ <1% THD
- Speaker Selector
11 speaker selector switches are provided to enable you to select 10 speakers individually or totally.
- 7-band Equalizer & Spectrum Analyzer
Installation of 7 band equalizer & spectrum analyzer according to frequency enables to tone control easily with your eyes.
(±10dB @ 63Hz, 160Hz, 400Hz, 1kHz, 2.5kHz, 6.3kHz, 16kHz)
- Tuner Memory
The total 30 memory address (FM : 18, AM : 12) in system can memorize the frequency of broadcasting station. You can use the desirable frequency conveniently.
- Full Logic Auto-Reverse Deck
For continuous playback of BGM, high reliable and full logic controlled auto reverse deck mechanism is provided.
This model has the function of not only autoreverse but also relay playback. When deck B reach to the end, deck A start playback automatically.
- 1 CD MP3 Player
The product has a built-in CDP that can play back the CD stored in a MP3 file format to enable convenient use. (Support playback of CD in CD / MP3 format.)
- Monitor Speaker on the Side Panel
You can monitor output signal by using the monitor speaker on the right side panel, and can control the monitor level on front panel by 3 step lever switch.
- Chime with four Tones
You can conveniently use four tone chime before the announcement.
- Input : 5 Balanced Mic and 2 AUX
- Priority Muting : Mic 1, 2 or all mic selectable
- Power Source : 100-120VAC or 220-240VAC ; 50Hz/60Hz
(supplied AC mains transformer depends on country requirements)
- Power Consumption : 230W
- Weight : 25kg / 55.1lb
- Dimension(WxHxD) : 420x266x310mm / 16.5x10.4x12.2in

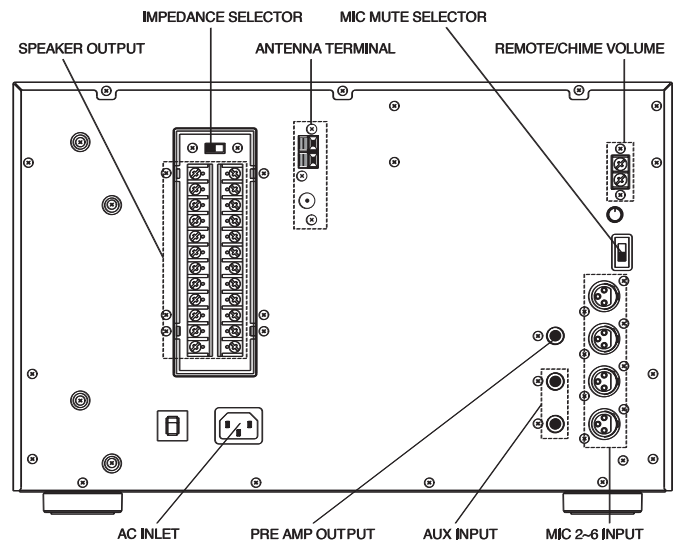

► Optional rack mount adapters are available.